


# Verbindungstechnik

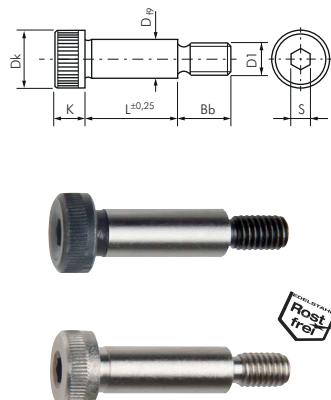

## Passschrauben mit Ansatz (Passschulterschrauben)

ähnlich ISO 7379

Typ Stahl 12.9 blank (schwarz)	Typ Edelstahl A2	D	D1	L	mögliche Länge				Dk	B	K	S
7379-4x **	7379-4x ** ES	4	M 3	4 - 5 - 6 - 8 - 10 - 12 - 16 - 20 - 25 - 30					7	7,0	3,0	2,0
7379-5x **	7379-5x ** ES	5	M 4	5 - 6 - 8 - 10 - 12 - 16 - 20 - 25 - 30 - 40					9	8,0	4,0	2,5
7379-6x **	7379-6x ** ES	6	M 5	10 - 12 - 16 - 20 - 25 - 30 - 35 - 40 - 45 - 50 - 55 - 60 - 65 - 70 - 80					10	9,5	4,5	3,0
7379-8x **	7379-8x ** ES	8	M 6	16 - 20 - 25 - 30 - 40 - 45 - 50 - 55 - 60 - 65 - 70 - 80 - 90 - 100					13	11,0	5,5	4,0
7379-10x **	7379-10x ** ES	10	M 8	16 - 20 - 25 - 30 - 35 - 40 - 45 - 50 - 55 - 60 - 65 - 70 - 80 - 90 - 100					16	13,0	7,0	5,0
7379-12x **	7379-12x ** ES	12	M 10	16 - 20 - 25 - 30 - 35 - 40 - 45 - 50 - 55 - 60 - 65 - 70 - 80 - 90 - 100					18	16,0	9,0	6,0
7379-16x **	7379-16x ** ES	16	M 12	25 - 30 - 35 - 40 - 45 - 50 - 55 - 60 - 65 - 70 - 80 - 90 - 100 - 120					24	18,0	11,0	8,0
7379-20x **	7379-20x ** ES	20	M 16	30 - 35 - 40 - 45 - 50 - 55 - 60 - 65 - 70 - 80 - 90 - 100 - 120					30	22,0	14,0	10,0
7379-24x **	---	24	M 20	50 - 55 - 60 - 65 - 70 - 80 - 90 - 100					36	27,0	16,0	12,0

\*\* bitte gewünschte Länge eintragen

☞ Bestellbeispiel: 7379-4x \*\*

Standardtyp

### mögliche Länge L:

4 mm . . . . .	-4	12 mm . . . . .	-12
5 mm . . . . .	-5	16 mm . . . . .	-16
6 mm . . . . .	-6	20 mm . . . . .	-20
8 mm . . . . .	-8	25 mm . . . . .	-25
10 mm . . . . .	-10	30 mm . . . . .	-30

